

360 XPS, EPS AND INSULATION PANELS

ADHESIVE PU FOAM (Straw)

1 – DESCRIPTION

360 XPS is one component aerosol polyurethane adhesive foam curing swiftly with moisture. Providing very fast and powerful adhesion for various construction materials, especially highly recommended for heat insulation systems. It is designed for easy dispensing through the straw adapter included with each can.

2 – PROPERTIES

- Powerful adhesion of polystyrene heat panels (XPS and EPS).
- Instant adhesion and wall plugging within two hours.
- More economical. Ready to use in aerosol can.
- Up to 9 m² heat insulation panel adhesion for each can.
- Minimum expansion during drying period.
- After dried, no further expansion and shrinkage.
- A lighter material compared to plaster, alternative material, used in heat insulation systems.
- No more extra burden or weight to building.
- High yield up to 45 liters, depending on the humidity and temperature.
- Usable at low temperature like 0 °C
- It does not contain any propellant gases which are harmful to the ozone layer.



3 - APPLICATIONS

- Best for mounting heat insulation panels and filling voids during adhesive application.
- Advised for wooden type construction materials adhesion to concrete, metal etc.
- Applications needed minimum expansion.
- Mounting and isolation for frames of windows and doors.

4 – INSTRUCTIONS

- Optimal can temperature is +20 °C. Application temperature is between 0 °C and +30 °C.
- Shake the can well before use.
- Screw the adapter on the valve.
- Hold the can upside down and activate the foam by pressing the valve.
- It is recommended to apply the foam from 3 cm inside of the edges and in 2-3 cm strips as shown in figure-1.

SARAY MAH.KÜÇÜK SU CAD. ANTASYA RESIDENCE No 64/A Kat 28 D.419 Ümraniye/ ISTANBUL –
TÜRKİYE +905399121030 info@silifix.com.tr

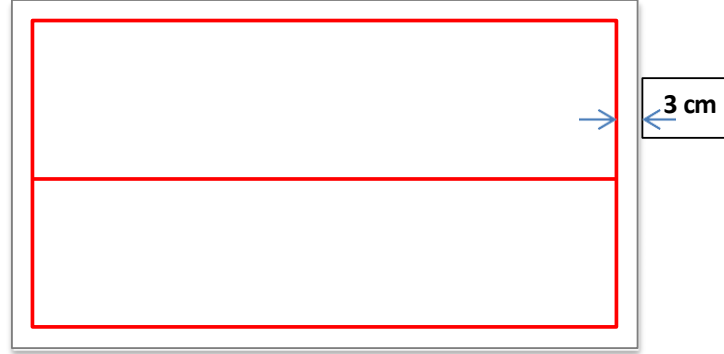


Figure-1

5- PACKAGING

Product	Volume/Weight	Package
360 XPS	750ml/Gw.850 gr	12

6- STORAGE AND SHELF LIFE

15 months if stored at room temperature.

7- RESTRICTIONS

- Storage above +30 °C and below +5 °C shortens shelf life.
- Should be stored and transported in vertical position.
- Should be kept in room temperature for at least 12 hours before the application.
- Cured foam will discolor if exposed to ultraviolet light.
- Paint or coat the cured foam for best results in outdoor applications.
- Dried foam can be wiped out by mechanical force.
- Lower temperatures decreases yield and curing time.

8- SAFETY

Contains Diphenylmethane-4, 4'-Diisocyanate. Harmful by inhalation. Irritating to eyes, respiratory system and skin. Do not breathe spray/vapor. Wear suitable protective clothing and gloves. Use only in well-ventilated areas. Pressurized container. Keep away from direct sunlight and do not expose temperatures over 50 °C. Do not pierce or burn, even after use. Keep away from sources of ignition, no smoking. Keep out of the reach of children.

SARAY MAH.KÜÇÜK SU CAD. ANTASYA RESIDENCE No 64/A Kat 28 D.419 Ümraniye/ ISTANBUL –
TÜRKİYE +905399121030 info@silifix.com.tr

9- TECHNICAL PROPERTIES

Basis	: Polyurethane Prepolymer
Curing System	: Moisture cure
Specific Gravity	: 22±3 Kg/ m ³ (ASTM D1622)
Tack-Free Time (1 cm width)	: 6±2 min (ASTM C1620)
Cutting Time (1cm width)	: 20-45 min (ASTM C1620)
Cure-Time	: 24 hours
Foam Color	: Light pink
Yield	: 30-45 L (ASTM C1536)
Elongation at break	: 13,6%
Fire Class of the Cured Foam	: B3 (DIN 4102-1)
Expanding volume (at wall)	: Minimal
Compression Strength	: 0,03 MPa (DIN 53421)
Tensile Strength	: 12,1 N/ cm ²
Temperature Resistance	: -40°C to +100°C
Application Temperature	: 0°C to +30°C

The results were obtained by providing optimum environmental conditions.